

EQ215特性:


- 滑动控制, 易于操作
- 软启动
- 调节灵活
- 稳定的左右通道
- 功能指示灯
- EQ215,15段



EQ215 (均衡器)

EQ231特性:

- 滑动控制, 易于操作
- 软启动
- 调节灵活
- 稳定的左右通道
- 功能指示灯
- EQ231,31段

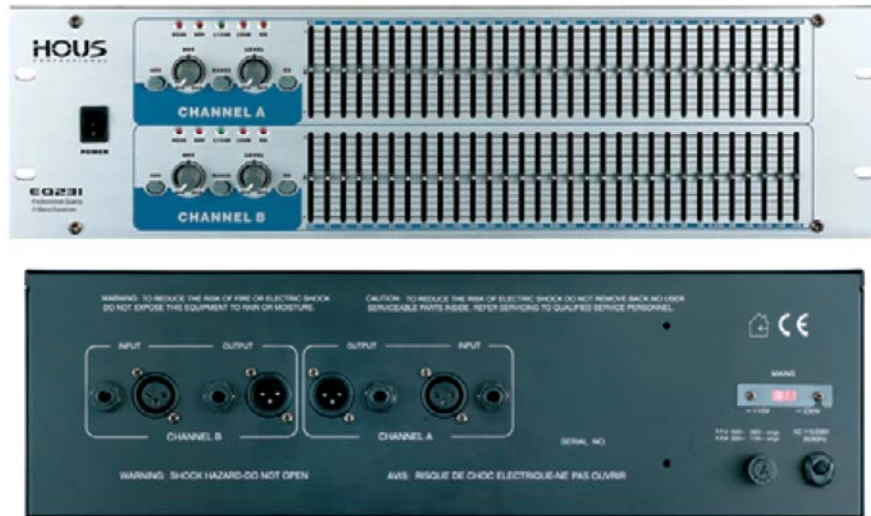

EQ231 (均衡器)

主要技术参数

型号	EQ 215
频响	20Hz-20KHz ± 1.0dB
总谐波失真	0.005% (20Hz-20KHz +3dB)
信噪比	>80dB
均衡频点控制	15 band(2/3 octave)
滤波频点	25,40,63,100,160,250,400,630,1K,1.6K,2.5K,4K,6.3K,10K,16KHz
变量范围	± 12dB/ ± 6d
峰值LED	-3dB before clipping
滤波	-12dB/octave(80Hz)
电源	115V/50-60Hz 220V/50-60Hz
功耗	10W
产品尺寸(W×D×H)	483×260×88mm
净重/毛重	3.8/4.6kg

型号	EQ 231
频响	20Hz-20KHz ± 1.0dB
总谐波失真	0.005% (20Hz-20KHz +3dB)
信噪比	>80dB
均衡频点控制	31 band(1/3 octave)
滤波频点	20,25,31.5,40,50,63,80,100,125,160,200,250,315,400,500,630,800,1K,1.25K,1.6K,2K,2.5K,3.15K,4K,5K,6.3K,8K,10K,12.5K,16K,200KHz
变量范围	± 12dB/ ± 6d
峰值LED	-3dB before clipping
滤波	-12dB/octave(80Hz)
电源	115V/50-60Hz 220V/50-60Hz
功耗	10W
产品尺寸(W×D×H)	482×197×132mm
净重/毛重	4.8/8kg

